



# JointVue® Inspection Tool

Supporting Conductor Quality at the  
Manufacturing Stage



# Identify Joints And Detect Wire Flaws At The Factory Stage With New User-Friendly Inspection Technology From Kinectrics!


Based on the original LineVue® technology, the Kinectrics JointVue® is a sophisticated sensor capable of detecting minute changes in cross-sections of steel stranding, used either on their own or as cores inside composite conductors. JointVue® is typically installed between the stranding point and the capstan.

As its name implies, JointVue® is ideally suited to detect core joints made at the end of steel core runs. The unique, advanced capabilities of JointVue® address the following conditions that may occur during manufacturing.

1. Joint steel cores while re-threading: when threading a new core length, the usual process is to hook the new length to the old one and pull it through the strander. To maintain product integrity, it is of prime importance to find the joint and remove it from the finished length of conductor.
2. Identifying defects in broken steel wires, which are virtually impossible to detect during stranding.

## Features

- Real-time automated monitoring of the steel wires as they are being stranded.
- User-friendly console box tailored to manufacturer's requirements. Depending on the amplitude of the signal, an audible/visual signal, programmable markings on the conductor or total stoppage of the strander can be programmed into the device.
- Local Fault (LF) sensing channel is used to detect local faults such as end of the steel core, and broken steel wires.
- LED bar graph displays the continuous amplitude of the LF signal. Durable encoder wheel and oil-filled nylon liner to prevent abrasion or damage to the sensing head and conductor in case of contact.
- Output indicators can be customized to meet the customer's individual requirements (buzzer, programmable markings, alarm, light etc.).
- Continuous inkjet technology is an optional addition to the device to provide markings at defect locations. The ink has been specifically designed for stranded conductors with slight surface grease—once applied, the ink dries instantly.

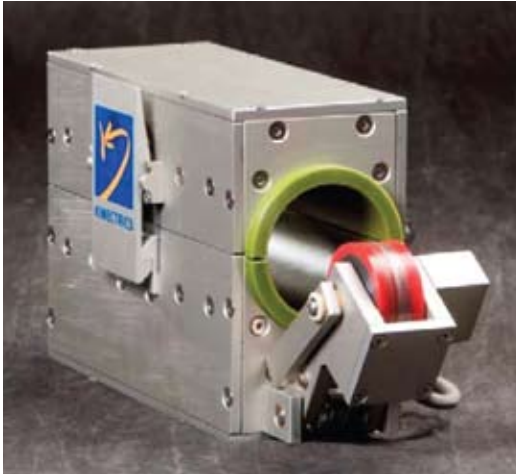

**Specifications**

Parameter	Value
Dimensions (Mounting frame not included)	L=37 cm (14.5 in), W=13 cm (5 in) H=18 cm (7 in)
Weight	14 kg (30 lbs.)
Conductor Centering Wheel / Encoder Wheel Material	Polyurethane
Conductor Diameter	Up to 66 mm (2.5/8 in)
Conductor Speed	Up to 300 feet/minute
Sensor Head Liner	Oil-filled nylon
Power Supply	AC 110-240V 50/60 Hz
Output Signals	25 V DC or contacts from relays

Kinectrics offers monitoring JointVue® equipment for lease (with renewal options) and technical support. Kinectrics' technical personnel will support the original JointVue installation, unit set-up, and provide training and demonstrations for machine operators.



[www.kinectrics.com](http://www.kinectrics.com)

**Head Office**

800 Kipling Ave., Unit 2  
Toronto, ON M8Z 5G5  
Canada  
416-207-6000

**Canada**

393 University Ave. 4th Floor  
Toronto, ON M5G 1E6

**USA**

2135 City Gate Lane, Suite 100  
Naperville, IL 60563

**United Kingdom**

17-18 Frederick Sanger Road  
Surrey Research Park  
Guildford, Surrey GU2 7YD

**Germany**

Hertha-Lindner-Strasse 10-12  
01067 Dresden

**Denmark**

c/o 360 Law Firm  
Gl.Kongevej 60  
DK- 1850  
Frederiksberg C

**Romania**

59 Grigore Alexandrescu Street.,  
2nd Floor Bucharest 010623

**India**

Sy No.125,  
Banda Mailaram Village,  
Mulugu Mandal, Siddipet District  
Telangana – 502 336

